

DATA SHEET

48 Fiber In Line OSP Splice Closure

For Installation in Both Underground and Aerial Environments

RLH Industries Outside Plant Fiber Splice Closure provides reliable and flexible installation for outdoor in-line and/or butt end applications. The compact size and high quality construction allows for installation in both underground and aerial environments.

Features


- 48 fiber capacity (splice trays included)
- 4 cable entry ports
- Aerial or underground applications
- Waterproof seal (IP 66)
- Temperature and chemical resistant
- 304 stainless steel hardware



48 Fiber OSP Splice Case - Closed



Splice Case Detail

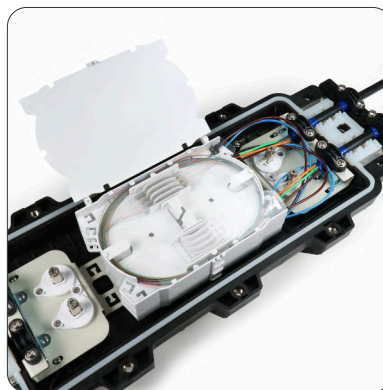

Installation Example



Open

Ordering Information

Description	Part Number
48 Fiber In Line OSP Splice Closure	RLH-OFSC-48-1


DATA SHEET

www.fiberopticlink.com

Specifications

Color	Black
Material	PP+GF
Dimensions (mm)	533(L) × 207(W) × 107(H)
Fiber Splice Capacity	48 Fiber
Number of Fibers Per Tray	24
Cable Ports	4
Cable Diameter (mm)	Φ10-21
Weight (Kg)	3.3 ~ 3.6
Protection Level	IP68
Installation Style	Outdoor underground or aerial, inline or butt end

Dimensional Information

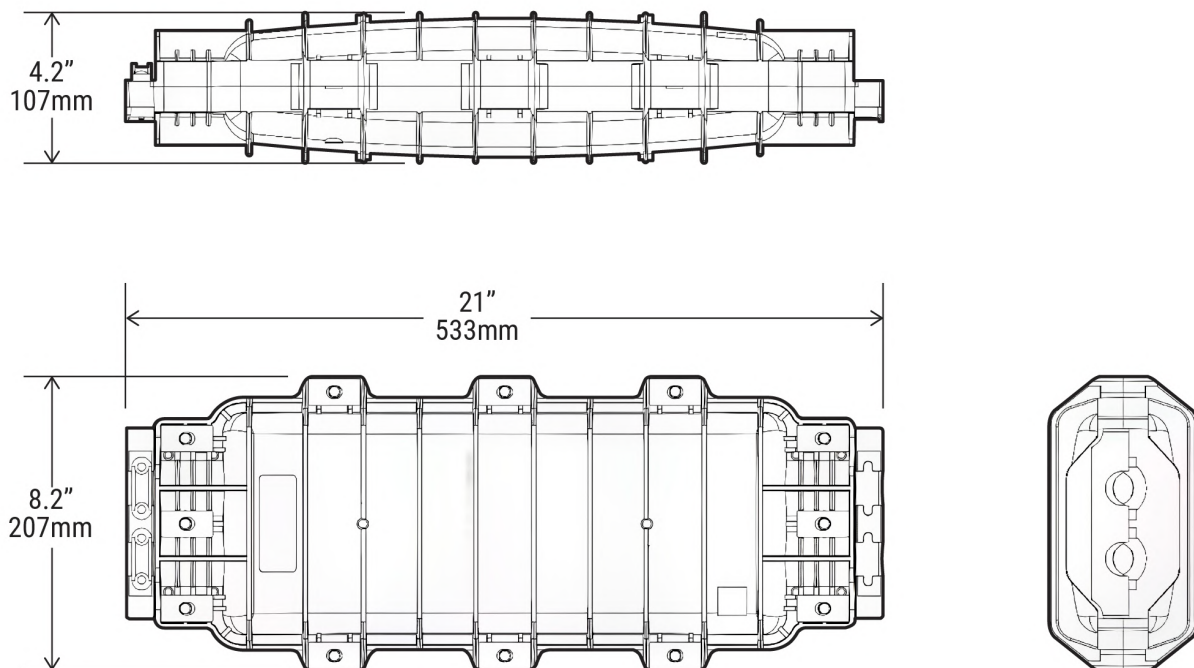

DATA SHEETwww.fiberopticlink.com**Contact**

By Mail:	Att: Sales RLH Industries, Inc. 936 N. Main St. Orange, CA 92867
----------	---

By Phone: Sales / Service Mon - Fri, 6am - 6pm, PST	Local	714-532-1672
	Toll Free	800-877-1672 866-DO-FIBER

By Email:	info@fiberopticlink.com
-----------	--

By FAX:	714-532-1885
---------	--------------

Tech Support

By Email:	support@fiberopticlink.com
-----------	--

By Phone:	Toll Free	855-754-2497 855-RLH-24X7
-----------	-----------	------------------------------