

## DATA SHEET

### Semi-Buried Pedestal (Type-02)

#### Small Footprint, Semi-Buried Pedestal

The RLH Type 02 semi-buried pedestal is a compact, all-dielectric enclosure with a small footprint designed for installation of fiber optic cable or other telecommunications equipment which requires a wooden backboard.

It features a vented lift-off cover and corrugated channel base. The lift-off cover allows full access to internal working area, and has a self-latching lock that is accessed using a hex style Can Wrench. A fire treated plywood backboard is preinstalled for mounting equipment or securing splicing and cable management.

The compact base is approximately W17.5" x D17", and the pedestal stands approximately 36" tall when installed. The base provides ample room for entry of multiple large cables, including conduit. The open bottom entry allows technicians to easily slide the base over existing cable applications. No mounting stakes or platforms are required.

RLH Pedestals may be customized for your particular application through our factory modification program.

#### Key Features

- All-dielectric construction
- Semi-buried base, no mounting stakes required
- Fire treated and painted 3/4" plywood backboard
- Self-locking cover with hex head release
- 11-position ground bar, accepts #14 to #1/0 AWG ground wire
- Removable splice closure bracket bar
- Oversized, interlocking base for solid foundation
- Heat dissipation vents for sensitive equipment
- Slim, unobtrusive design has minimum visual impact
- Removable cover permits 360° access to equipment
- Available with terminal options
- Made in USA

#### Ordering Information

Description	Part Number
H48" x W17.5" x D17" with 3/4" Fire Retardant Plywood Backboard	SPB-02-A-1



Type 02 Semi-Buried Pedestal





Backboard with cover removed

## DATA SHEET

[www.fiberopticlink.com](http://www.fiberopticlink.com)

### Key Specifications

<b>Construction:</b>	All-dielectric high performance molded thermoplastic with backboard and self-locking cover
<b>Mounting Style:</b>	Semi-buried, approximately 36" above grade; pedestal should be buried approximately 12" below grade
<b>Included:</b>	H48" x W17.5" x D17" with ¼" Fire Retardant, Painted Plywood Backboard 11-position ground bar, wire capacity (Qty. 8 – #14 to #6 AWG, Qty. 3 – #14 to #1/0 AWG)
<b>Options:</b>	Fiber connectivity and cable accessories
<b>Size:</b>	17.5" (W) x 17" (L) x 48.5" (H), (440mm x 430mm x 1230mm) *Unburied

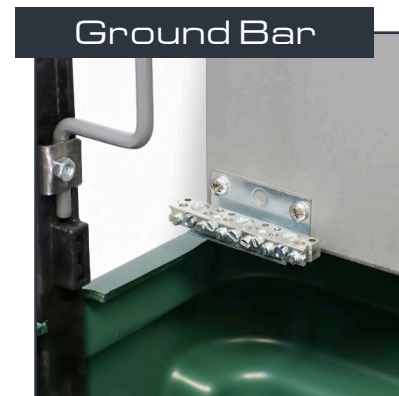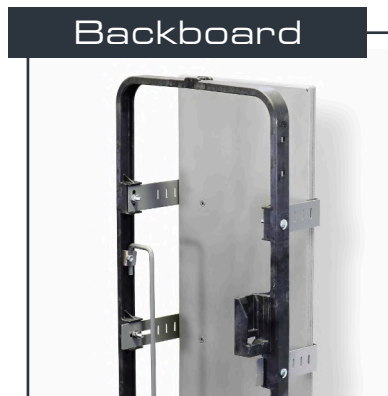

### Contact

By Mail: Att: Sales  
RLH Industries, Inc.  
936 N. Main St.  
Orange, CA 92867

By Phone: Sales / Service Mon - Fri, 6am - 6pm, PST	Local	714-532-1672
	Toll Free	800-877-1672
		866-DO-FIBER

By Email: [info@fiberopticlink.com](mailto:info@fiberopticlink.com)

By FAX: 714-532-1885

### Tech Support

By Email: [support@fiberopticlink.com](mailto:support@fiberopticlink.com)

By Phone:	Toll Free	855-754-2497
		855-RLH-24X7